


PCB Layout

■ 图示(Pic. shown) : TLCH-400VA-04P-B02

General. Multi Connection System Rated : 630V,20A
Single row , 7.50mm pitch , 02-12 Pole
Orientation:90°(plug-in to board)

认证 (Approval) :

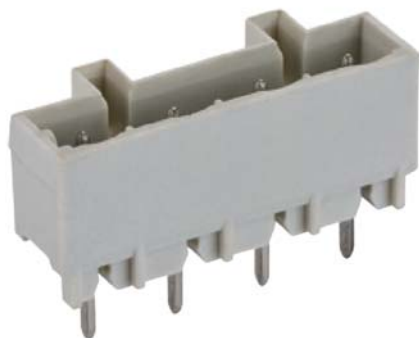

■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		B	C	D			
额定电压(Rated voltage)		300V	--	300V	--	630V	--
额定电流(Rated current)		16A	--	10A	--	20A	--
额定连接容量(Rated connection capacity)		--			--		
绝缘材料(Insulation Material)				PA66 UL94 V-0			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Copper alloy , Tin plated			
接线弹片材料(Material of Clamp spring)				--			
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V			
耐电压(1分钟)(Withstanding Voltage/1Min)				4200V/1Min			
额定冲击电压(Rated surge voltage)				6.0KV			
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)				--			
固定螺丝(Mounting Screw) , 扭矩(torque)				--			
剥线长度(Wire stripping length)				--			
使用温度(Operating temperature)				-40°C up to +115°C			
焊接方式(Soldering recommend)		Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

■ 订购方式(How to order)

TLCH	4	00	V	A	XXXX	XXP	B02
Series No. 系列号	Pitch间距 4=7.50mm	Differentiate Number 区分号	Connection angle 角度 V=90° wire-to-board	Against Mismatching Protecting 防错插保护	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 02-12P	Color 颜色 Beige : B02

Web:www.china-tianli.com

TEL:+86-574-6347-9600,6389-6436

Mail : sale@china-tianli.cn

地址:中国浙江省宁波杭州湾新区庵东工业园区纬三路138号

ADD : 138 , Weisan Rd.,Andong Development Zone, Hangzhou Bay Area, Ningbo, Zhejiang, China


插头 (Female Connector)



P/N : TLCP-400A
Wiring orientation :
180°(wire to plug-in)
Rated : 630V,20A , 2.5mm²
Spring clamp unit.



P/N : TLCP-400FA
Wiring orientation :
180°(wire to plug-in)
Rated : 630V,20A , 2.5mm²
Spring clamp unit.



P/N : TLCPL-400A
Wiring orientation :
180°(wire to plug-in)
Rated : 630V,20A , 2.5mm²
Spring clamp unit.
With locking levers