




■ 图示(Pic. shown) : TD201-12-08P-KC

General.	PCB terminal block	Rated : 300V, 15A , 22-14 Sol&Str
	Single row , 7.62mm pitch , 04-60 Pole	
	Wiring orientation: 180°(wire-to-board)	
	Screw clamp unit: M3.0, 0.8Nm Max	

认证 (Approval) :

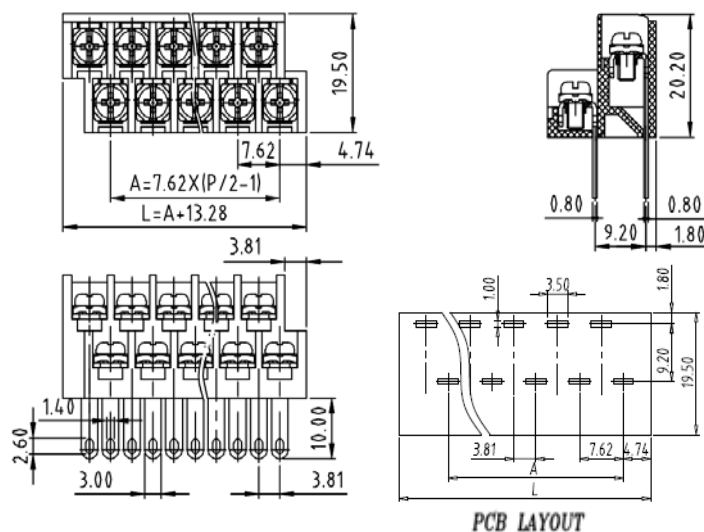

■ 技术参数Technical Data	UL standard			IEC standard		
UL应用组别(UL Application group)	UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)	B	C	D	III / 3	III / 2	II / 2
额定电压(Rated voltage)	300V	--	300V	--	--	--
额定电流(Rated current)	15A	--	10A	--	--	--
额定连接容量(Rated connection capacity)	22-14AWG Sol&Str			--		
绝缘材料(Insulation Material)			PBT G30			
电流承载部件材料和镀层(Material & Plating of Current carrier)			Copper alloy , Tin plated			
接线弹片材料(Material of Clamp spring)			--			
绝缘电阻(Insulation Resistance)			500MΩ or more at DC500V			
耐电压(1分钟)(Withstanding Voltage/1Min)			2000V			
额定冲击电压(Rated surge voltage)			--			
接线螺丝(Wire clamp unit Screw) , 最大扭矩(torque Max.)			M3.0 , 0.8Nm Max			
固定螺丝(Mounting Screw) , 扭矩(torque)			--			
剥线长度(Wire stripping length)			--			
使用温度(Operating temperature)			-40°C up to +105°C			
焊接方式(Soldering recommend)	Wave soldering ,260°C 5S Max (Single Wave) , 260°C 10S Max(Double Wave)					

■ 订购方式(How to order)

TD	201	12	XXXX	XXP	K	C
Series No. 系列号	Differentiate Number 区分号	Solder Pin Spec 焊针规格	Special code 特编号 XXXX=custom-made blank=standard	No. of Poles 极数 04-60P	Color 颜色 Black: K	Screw Type 螺丝S=Slot C=Cross