



QUICK PLUG CONNECTOR P.C.B.-TQQ-A-2.8-XXP-X

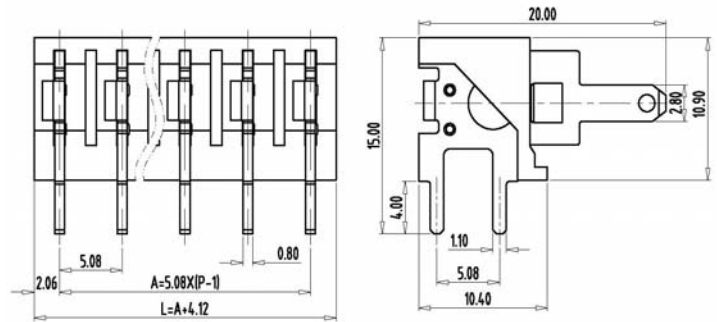

PCB Layout



■ 图示(Pic. shown) : TQQ-A-2.8-07P-K

General.
Quick plug connector P.C.B Rated : 300V,6A
Single row , 5.08mm pitch , 02-17 Pole
Orientation: 180°(plug-in to board)
Screw clamp unit:

认证 (Approval) : 

■ 技术参数Technical Data		UL standard			IEC standard		
UL应用组别(UL Application group)		UL Application group			IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		
IEC过电压别/污染等级(IEC overvoltage category /pollution degree)		B	C	D	III / 3 III / 2 II / 2		
额定电压(Rated voltage)		300V	--	--	--	--	--
额定电流(Rated current)		6A	--	--	--	--	--
额定连接容量(Rated connection capacity)		--			--		
绝缘材料(Insulation Material)				PC UL 94 V0			
电流承载部件材料和镀层(Material & Plating of Current carrier)				Steel , Tin plated			
接线弹片材料(Material of Clamp spring)				--			
绝缘电阻(Insulation Resistance)				500MΩ or more at DC500V			
耐电压(1分钟)(Withstanding Voltage/1Min)				1600V			
额定冲击电压(Rated surge voltage)				--			
适合的母端接线范围(Suitable Wire Range in female contact)				18AWG			
固定螺丝(Mounting Screw) , 扭矩(torque)				--			
剥线长度(Wire stripping length)				--			
使用温度(Operating temperature)				-40℃ up to +125℃			
焊接方式(Soldering recommend)		Wave soldering ,260℃ 5S Max (Single Wave) , 260℃ 10S Max(Double Wave)					

■ 订购方式(How to order)

